

★ *Snap-Tite*

Chemical  
Coupling

**25**  
SERIES



# ★ Snap-tite 25 Series — Chemical Coupling

*Featuring... Snap-tite quality with superior pressure and flow characteristics over the competition.*




- 316 stainless steel construction
- Dependable operation
- Teflon or Kel F seals available
- Available sizes: 1/4", 1/2" x 3/8" and 1/2"
- Operating pressures to 1000 psi (69 bar)
- Tubular valve design
- Optional sleeve lock available

*Although economically priced, the 25 Series quick disconnect will handle virtually all types of chemicals. These quick disconnects are ideally suited for systems that must come in contact with families of fluids that have widely varying chemical characteristics. Liquids such as aromatic hydrocarbons, alcohols, esters, ketones, ethers, strong caustics, sulfuric acid and hydrofluoric acid as well as many other highly corrosive materials pose no problem for the 25 Series. The 25 Series may also be used with cryogenic liquids under certain conditions when Kel F seals are specified.*

*This series utilizes a barrel-type valve construction with a seal mounted in the valve to assure equalized valve-seat sealing. A unique lip seal provides a highly reliable seal in the connected position and acts as a wiper when disconnecting.*

<b>PRESSURE RATINGS</b>				
SIZE (inches)	MAXIMUM WORKING PRESSURE		MINIMUM BURST PRESSURE	
	PSI	BAR	PSI	BAR
1/4"	1,000	69	2,000	138
1/2" x 3/8"	1,000	69	2,000	138
1/2"	1,000	69	2,000	138

## TECHNICAL AND DIMENSIONAL INFORMATION\*

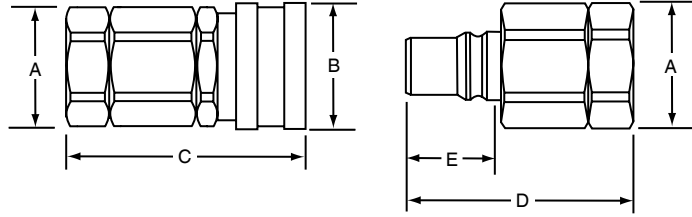


### DIMENSIONS

Size	A (HEX)		B		C		D		E	
	in	mm	in	mm	in	mm	in	mm	in	mm
1/4"	.88	22.35	1.19	30.23	2.01	51.05	1.80	45.72	.80	20.30
1/2" x 3/8"	1.19	30.23	1.38	35.05	2.41	61.21	2.30	58.42	.97	24.64
1/2"	1.19	30.23	1.38	35.05	2.50	63.50	2.38	60.45	.97	24.64

\*NOTE: Dimensions and outlines are the same for both valved and plain units

## FLOW CHART - VALVED AND VALVED

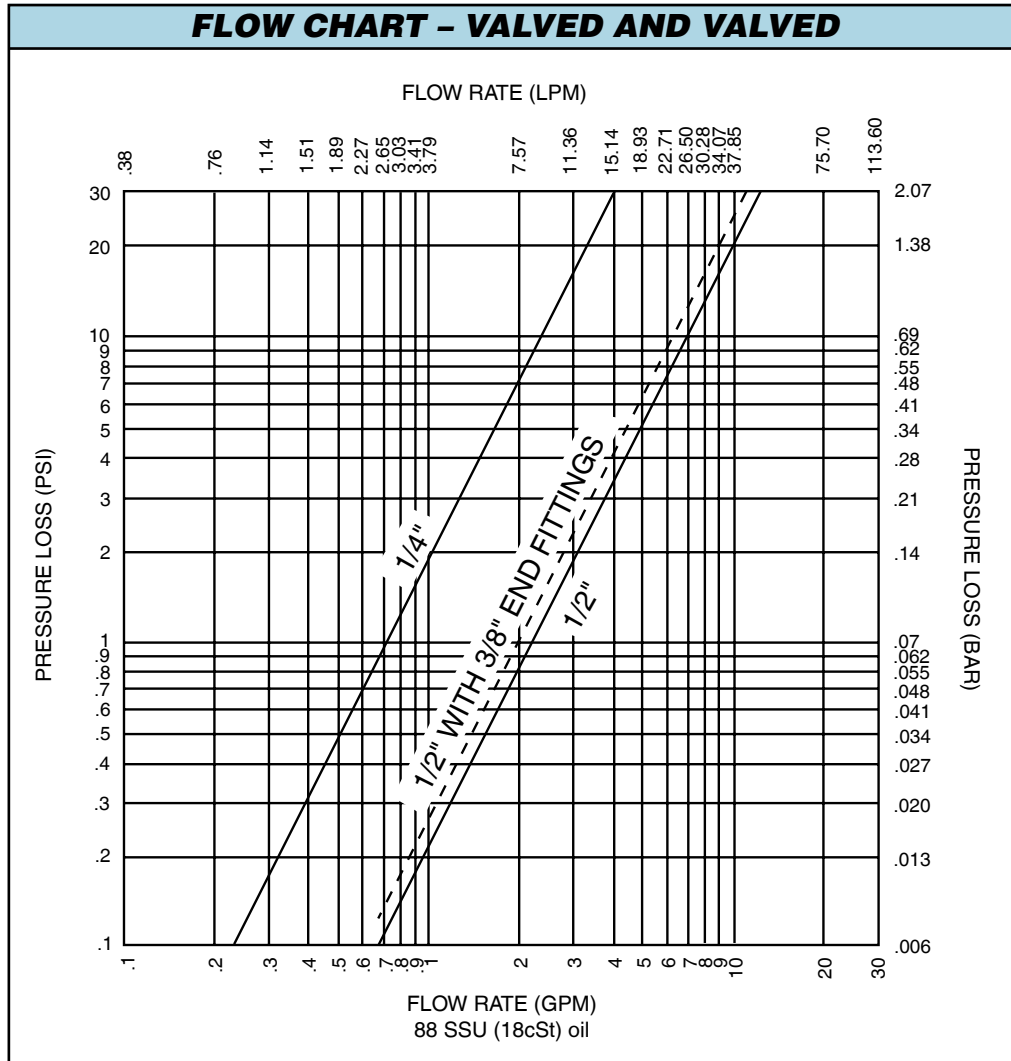

## HOW TO ORDER

Part No. S V 25 C 4 - 4 F    

Material	Body Type	Series	Coupling Half	Coupling Size	End Fitting Size	End Fitting Type	Seal Material	Sleeve Lock
<b>S</b> Stainless Steel 316	<b>V</b> Valved <b>P**</b> Plain (without valve)	<b>25</b>	<b>C</b> Coupler <b>N</b> Nipple	<b>4=1/4"</b> <b>8=1/2"</b>	<b>4=1/4"</b> <b>6=3/8"</b> <b>8=1/2"</b>	<b>F</b> Female NPSF <b>M</b> Male NPT <b>RP</b> Female British Parallel BS2779	No letter Teflon -100°F to 350°F -73°C to 177°C <b>KF*</b> Kel F -400°F to 300°F -240°C to 149°C	<b>SL</b>

\*Kel-F seal is installed in coupler only. Mating nipple supplied with Teflon only.

\*\*Valved nipple/plain coupler combination will not activate valving in nipple. Single shut-off should be specified with valving in coupler half.

### ACCESSORIES

SIZE	PRESSURE CAP	DUST CAP	DUST PLUG
1/4"	SPC25-4	SDC25-4	SDP25-4
1/2"	SPC25-8	SDC25-8	SDP25-8

#### ! WARNING !

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND/OR PROPERTY DAMAGE.

*This document and other information from Snap-tite, Inc., its subsidiaries and authorized distributors, provides product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operation conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.*

*The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Snap-tite, Inc. and its subsidiaries at any time without notice.*



**Quick Disconnect & Valve Division**  
201 Titusville Road  
Union City, Pennsylvania 16438-8699 USA  
PH: 814-438-3821 FAX: 814-438-3069  
e-mail: [qd&v\\_sales@snap-tite.com](mailto:qd&v_sales@snap-tite.com)  
[www.snap-tite.com](http://www.snap-tite.com)



Industrial Estate  
Whitemill - Wexford  
Republic of Ireland  
PH: 353 53 914 1566 FAX: 353 53 914 1582  
e-mail: [ste\\_sales@snap-tite.com](mailto:ste_sales@snap-tite.com)  
[www.snap-tite.com](http://www.snap-tite.com)

**ISO-9001 Certified**